


Assembly Instruction

- Steps:
- ① Unfold chair frame (D) on floor. (As indicated by the arrows.)
 - ② Insert castors (I) into the holes at the end of chair frame (D).
 - ③ Tighten the metal bracket of seat in the middle of chair frame (D) with screw (a) from the upper portion. (As indicated by the arrows.)
 - ④ Attach backrest(A) into the hole of chair frame(D).
 - ⑤ Insert backrest rolling plug(G) into the corresponding inner hole of chair frame (D), Tighten with screw (b).
 - ⑥ Disassemble the finished seat cushion (C) by taking down oblong metal piece(H) and plastic cover (E) after remove screws on both sides of seat cushion (C) in the bottom .
 - ⑦ Attach the disassembled seat cushion (C) with chair frame (D). The back groove on seat cushion (C) should be match with the back metal tube on chair frame (D). Tighten oblong metal piece(H)going with plastic cover(E) by screw (c)from the bottom portion .
 - ⑧ Insert upper end arm into the hole of metal leg. Please make sure the rounded button of armrest(B) pop out from the inner hole on metal leg.

Make sure all the screws are fully tightened before using the chair.

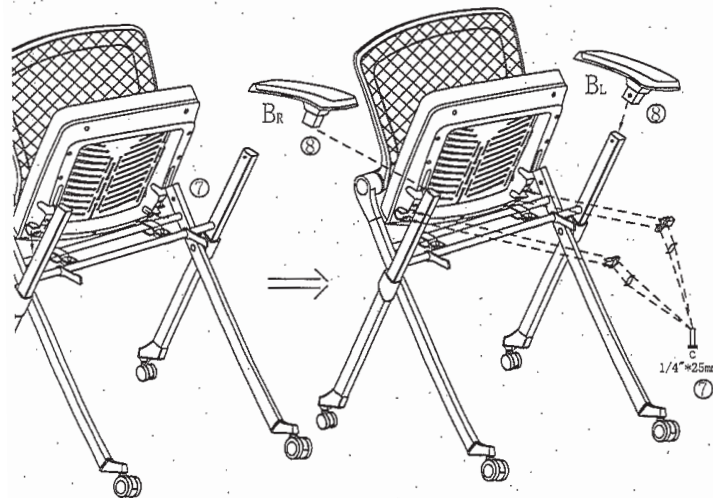



No.	Component	Qty.
A	Backrest	1
B	Armrest	L/R
C	Seat Cushion	1
D	Chair Frame	1
E	Plastic Cover	L/R
F	Wrench M4	1
G	Backrest Rolling Plug	3
H	Oblong Metal Plate	2
I.	Castor	4

Screw list:

No.	Specification	Qty.	Standby
a	1/4"*8mm	2	1
b	3/16"*15.9mm	2	1
c	1/4"*25mm	4	

Notes:

1. Carefully check all the components according to instruction before assembling.
2. Please assemble carefully in order to avoid any scratch, especially baking finished components.






photo

NOTES

Place all laminated parts on a cleand and smooth surface such as a rug or carpet to avoid the parts from being scratched.
 Check to be sure that you have all parts and hardware.
 Remove all wrapping materials, including staples and packing straps before you start to assemble.
 Keep all hardware parts out of reach of children.

Ziggy With Tablet

Assembly Instructions

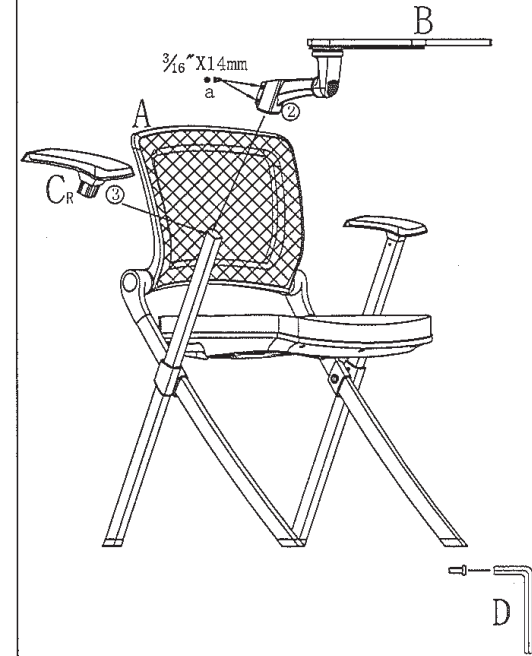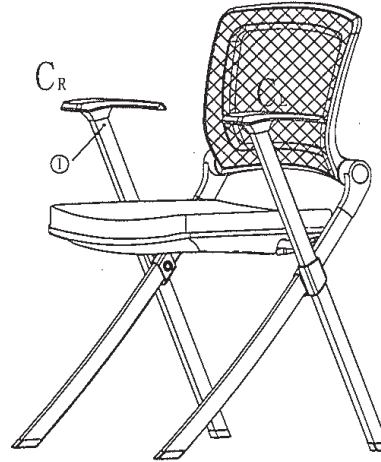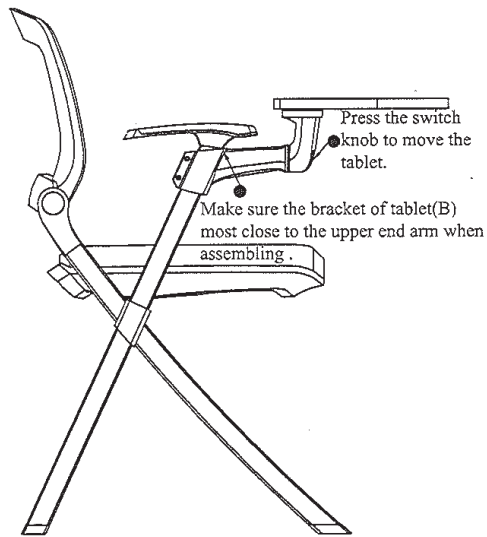

Assembly Instruction

- Steps:
- ① Pull out the assembled right upper end arm (Cr) after press the rounded button of armrest (Cr) in the right hand side.
 - ② Insert tablet (A) into the back metal leg.
 - ③ Insert upper end arm (Cr) into the hole of metal leg .Please make sure the rounded button of armrest drilled out from the inner hole on metal leg.
 - ④ Tighten screws(a) on the bracket of tablet (B)after upward the bracket of tablet (B) most close to the upper end arm.

Make sure all the screws are fully tightened before using the chair.


No.	Component	Qty.
A	Seat cushion	1
B	Tablet	1
C	Armrest	L/R
D	Wrench	1

Screw list:

No.	Specification	Qty.	Standby
a	$\frac{3}{16}$ "X14mm	2	1
b	$\frac{3}{16}$ "X9X5mm	2	1

Notes:

1. Carefully check all the components according to instruction before assembling.
2. Please assemble carefully in order to avoid any scratch, especially baking finished components.
3. Please loosen the screws accordingly when the tablet hard to assembled. But do not pull out the screws completely.



NOTES

Place all laminated parts on a clean and smooth surface such as a rug or carpet to avoid the parts from being scratched. Check to be sure that you have all parts and hardware. Remove all wrapping materials, including staples and packing straps before you start to assemble. Keep all hardware parts out of reach of children.